




Project _____ Catalog # _____ Prepared by _____ Notes _____ Order # _____ Date _____

LED Linear Architectural Lights

Up and Down Adjustable Linear Architectural Lights


DESCRIPTION

The RUN BISON LED selectable wattage LED Linear Fixture is a versatile architectural suspension light, featuring a sturdy aluminum housing and a sleek architectural design that adds a touch of modern elegance to any space, perfect for commercial environments such as offices, healthcare facilities, and hotels. The Architectural Linear Light features 5-color select (5CCT), 0-10V dimming, and a voltage range of 120-277V. Provides lighting distribution options of 70% Downlight 30% Up light, 90% Downlight 10% Up light, 100% Downlight. It also offers optional upper light modules and joint connectors for multiple linkages. Installation is flexible, allowing for surface, recessed, wall mounting, or suspension with the included hanging kit. This fixture ensures uniform light distribution, making it an excellent choice for various commercial applications.

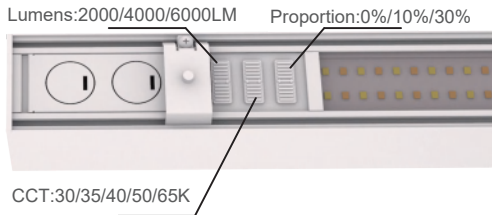

DIMENSION

Type	MLAS2FT-15/20/25W-5CCT	MLAS4FT-30/40/50W-5CCT MLAS4FT-30/40/50W-5CCT-BK	MLAS8FT-60/80/100W-5CCT MLAS8FT-60/80/100W-5CCT-BK
Length(Inch)	24.01	48.03	96.06
Wight(Inch)	1.97	1.97	1.97
Height(Inch)	2.95	2.95	2.95
Weight(LB)	2.98	4.30	8.16

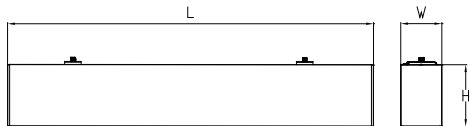

ORDERING INFORMATION

Series	MLAS2FT-15/20/25W-5CCT	MLAS4FT-30/40/50W-5CCT MLAS4FT-30/40/50W-5CCT-BK	MLAS8FT-60/80/100W-5CCT MLAS8FT-60/80/100W-5CCT-BK
CRI	>80	>80	>80
Power	15/20/25W	30/40/50W	60/80/100W
CCT	3000K/3500K/4000K/5000K/6500K	3000K/3500K/4000K/5000K/6500K	3000K/3500K/4000K/5000K/6500K
Lumens	1725/2300/2875LM	3450/4600/5750LM	5750/7360/11500LM
Efficacy	115LM/W	115LM/W	115LM/W
Dimmable	0-10V	0-10V	0-10V





SPECIFICATION FEATURES

5CCT

- Select color temperature from 3000K Warm White, 3500K natural white, 4000K cool white, 5000K daylight, or 6500K Cool Daylight for your environment.

CONSTRUCTION

- Housing Material: Aluminum
- Optics: PS Lens
- Finish: White, Black

OPTICS

- Lumileds LED high luminous, greatly improve the light utilization and evenness
- CRI 80+



DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.
- Working temperature: -4°F~113°F
- storage temperature: -22°F~140°F.



MOUNTING

- Multiple mounting methods with selected bracket option.

COMPLIANCE/CERTIFICATION

- UL & CUL listed.
- EMI/RFI emissions per FCC 47CFR Part 15B.
- RoHS compliant, contains no mercury or lead.
- Suitable for wet locations.

PHOTOMETRY

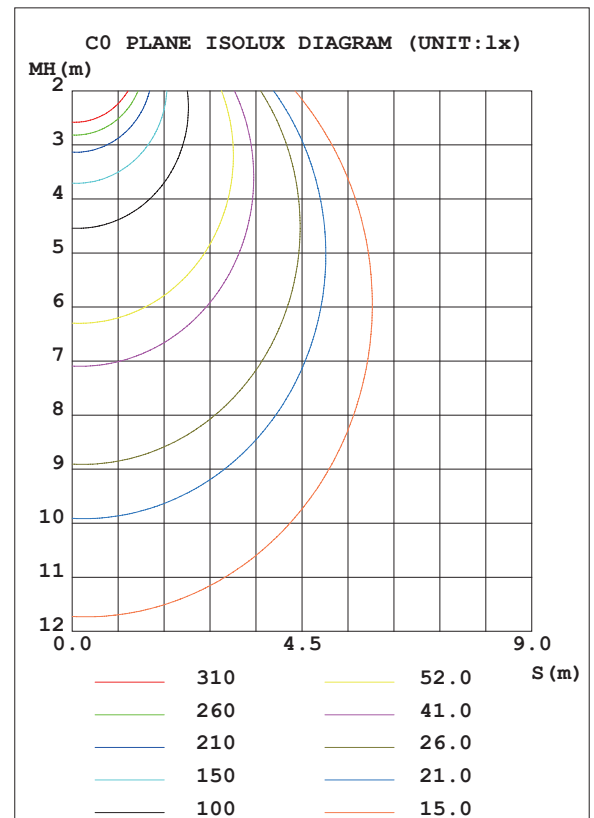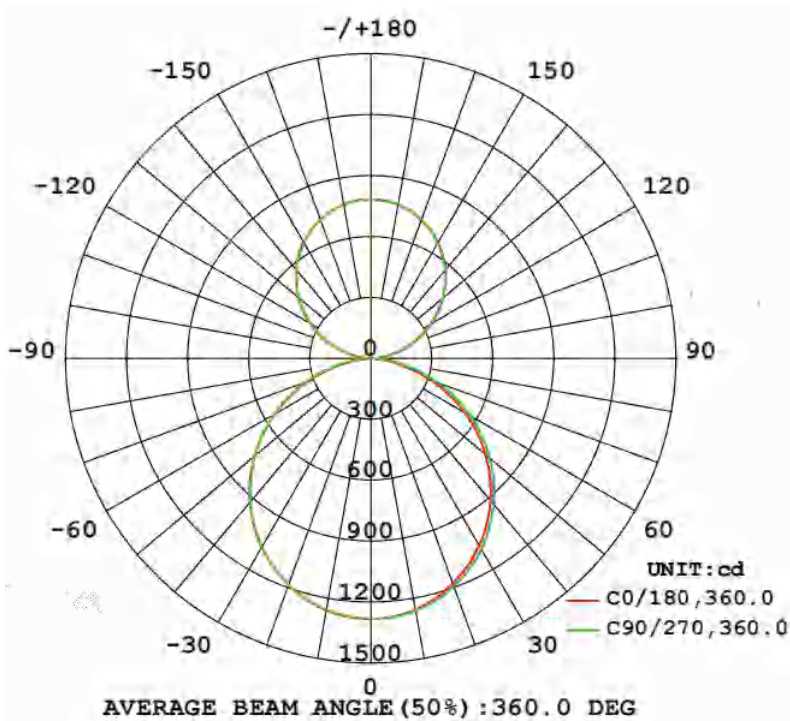

ACCESSORIES



“—” JOINER



“L” JOINER



SURFACE-MOUNTED KITS



WALL-MOUNTED KITS 1



LSA-DWC-CNPY-BL



LSA-DWC-CNPY-WH

WARRANTY

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to support@runbisonlighting.com for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.