



Project _____ Catalog # _____ Prepared by _____ Notes _____ Order # _____ Date _____

LED High Light Linear Vapor Tight Fixture



4 FT 3CCT Vapor Tight Luminaire

DESCRIPTION

Vapor Tight Fixture, the luminaries ideal for a variety of industrial, commercial, vandal resistant, and residential applications. Installed either indoors or outdoors, this fixture provides superior light distribution intended for areas where moisture and dust may be present. Light weight, flexible, and durable polycarbonate materials makes the luminaire vandal resistant and highly impact resistant. Simple with 50000H long life time.



Unit: inch(mm)

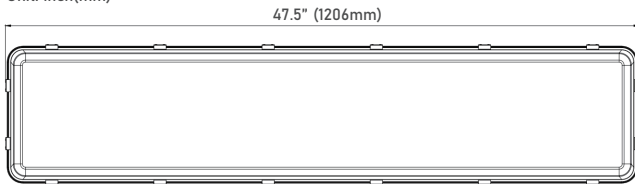

DIMENSION

Type	4FT
Length(Inch)	47.5
Wight(Inch)	10.5
Height(Inch)	4.5
Weight(LB)	18.6

ORDERING INFORMATION

Series	LJC-LVTP-4FT2L-82003-235D
CRI	80
Power	155/185/200W
CCT	3500K/4000K/5000K(CCT Selectable)
Lumens	25000/30000/32000LM
Efficacy	160LM/W
Dimmable	0-10V





SPECIFICATION FEATURES

3CCT

• Select color temperature from 3500K natural white, 4000K cool white, or 5000K daylight for your environment.

CONSTRUCTION & OPTICS

- 160 lm/W
- Field-adjustable CCT and Power
- NSF, NEMA4X, IP66, IK10
- 5VA Flame Rating
- Ambient Range -40 °F to 122 °F
- DC Sensor solution available

DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

MOUNTING

- V-Hook ready
- Surface mounting

COMPLIANCE/CERTIFICATION


- DLC Listed
- UL 1598 suitable for wet locations
- UL94 5VA flame classification.

NEMA4X




PHOTOMETRY

Typical Color Spectrum

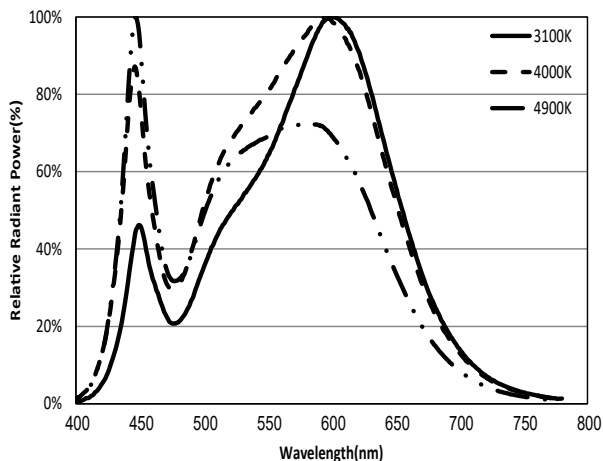

Typical Polar Radiation Pattern at 150mA, Tsp=25°C

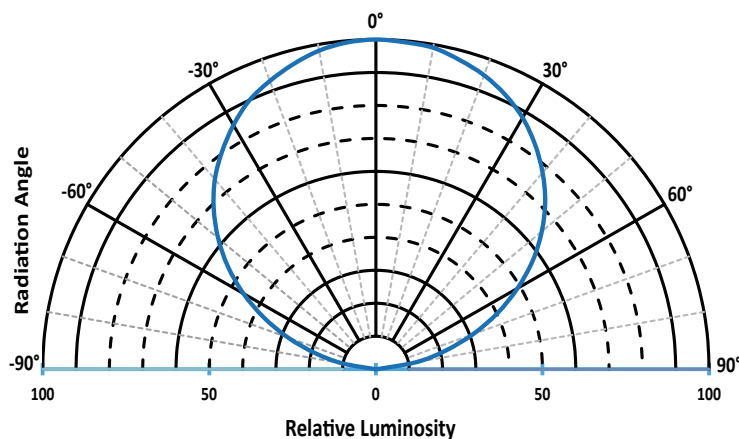

WARRANTY

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to support@runbisonlighting.com for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.

