



Project \_\_\_\_\_ Catalog # \_\_\_\_\_ Prepared by \_\_\_\_\_ Notes \_\_\_\_\_ Order # \_\_\_\_\_ Date \_\_\_\_\_

# LED PARKING LOT LIGHT



## Wattage Selectable Led Parking Lot Light



### DESCRIPTION

Robust and reliable, this LED product is a economical solution for your industrial applications. Constructed out of heavy duty die-cast aluminum with architectural baked polyester powder coating for lasting durability. Designed to replace the non-LED light fixture.

This product is UL & CUL certified. It is popular in side walk, parking lots, swimming pools, public area and other commercial area.

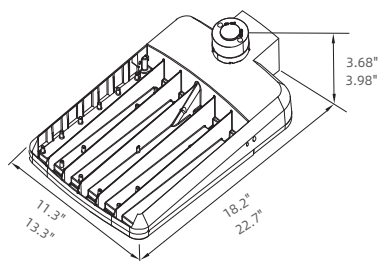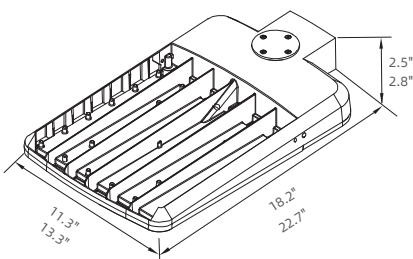

### DIMENSION

Type	MSB-100/150/200W-50K	MSB-100/150/200W-50K-SB	MSB-200/240/300W-50K	MSB-200/240/300W-50K-SB
Length(Inch)	18.2	18.2	22.7	22.7
Wight(Inch)	11.3	11.3	13.3	13.3
Height(Inch)	2.5	3.68	2.8	3.98
Weight(LB)	6.96	6.96	10.75	10.75

### ORDERING INFORMATION

Series	MSB-100/150/200W-50K	MSB-100/150/200W-50K-SB	MSB-200/240/300W-50K	MSB-200/240/300W-50K-SB
CRI	>80	>80	>80	>80
Power	100/150/200W	100/150/200W	200/240/300W	200/240/300W
CCT	5000K	5000K	5000K	5000K
Lumens	13000-19500-26000LM	13000-19500-26000LM	26000-31200-39000LM	26000-31200-39000LM
Efficacy	130LM/W	130LM/W	130LM/W	130LM/W
Dimmable	0-10V	0-10V	0-10V	0-10V





## CONSTRUCTION

- Unit includes heavy duty cast aluminum housing, LED array, heat sink, lens and gasket.

## OPTICS

- Lumileds LED high luminous, greatly improve the light utilization and evenness
- CRI 80+

## DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

## MOUNTING

- Multiple mounting methods with selected bracket option.

## COMPLIANCE/CERTIFICATION

- UL & CUL listed.
- EMI/RFI emissions per FCC 47CFR Part 15B.
- RoHS compliant, contains no mercury or lead.
- Suitable for wet locations.



## Optional Fittings

### Optional Brackets (Sold Separately) and Installation Instructions

There are optional brackets for this fixture. The following is shoebox fixtures with different brackets.



## WARRANTY

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to [support@runbisonlighting.com](mailto:support@runbisonlighting.com) for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.

